


LED TECHNOLOGY

450 sqm
Illuminated area

Leader in
sustainability 

BATTERY Line

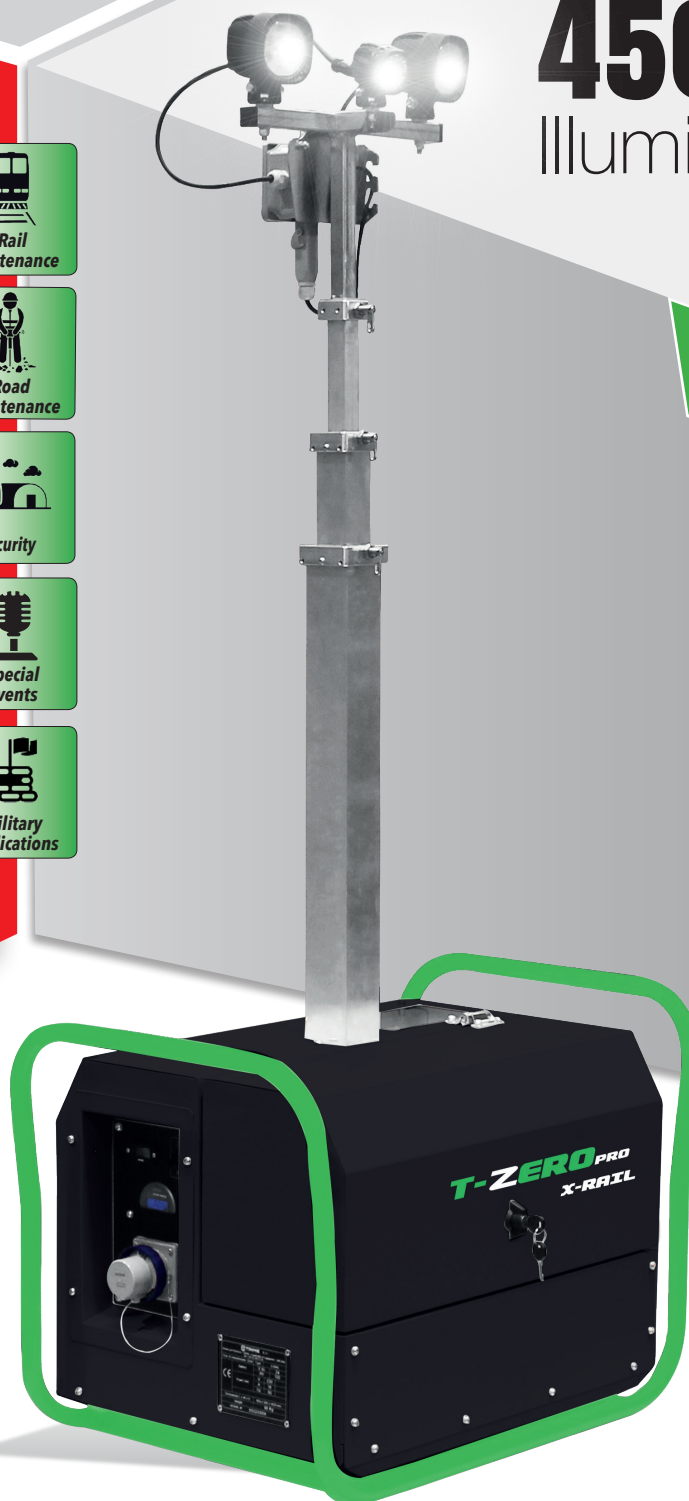


Operation: 100% BATTERY
Power Battery Pack 25,9Vdc 200Ah

X-RAIL
2x29W+1x13W LED
T-ZERO^{PRO}

X-RAIL

2x29W+1x13W LED

T-ZERO^{PRO}

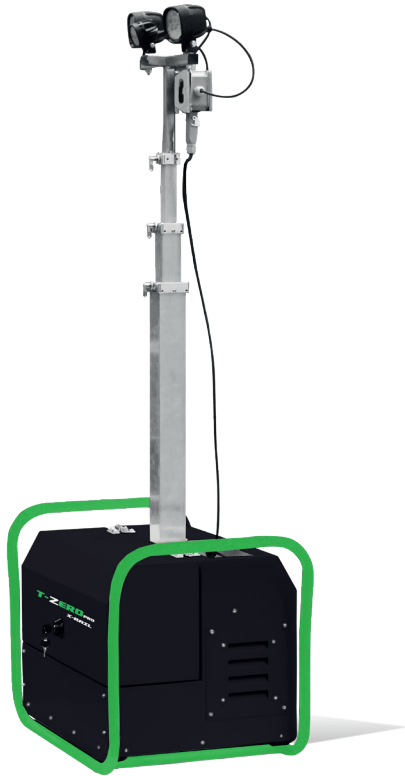

FEATURES

- 25,9V 200Ah built-in Lithium Battery
- Battery Charger 24V 60A (230V 1Ph Built-in)
- Mains Input 230V 16A
- Battery Charger Gauge
- Floodlights Hour meter
- Removable lithium battery
- Full aluminum body
- Tubular Frame for manual handling
- Multi-directionally adjustable and tiltable floodlights
- 3 section galvanized telescopic vertical mast
- Maximum mast height 3120mm
- Manual lifting system
- 80 µm powder coating
- **Very compact dimensions for easy handling & transportability, up to 42 units per truck**
- Light weight for improved manoeuvrability
- **60hrs running time from battery**
- **3hrs recharge**

ZERO
CARBON EMISSION

100%
BATTERY
first unique battery driven

Leader in
sustainability

RUNNING TIME
60 H

ZERO
noise

450 sqm
illuminated area

VERY COMPACT DIMENSIONS
for easy handling & transportability

42 units per truck

Dimensions & weight	Dimensions min (mm)	Dimensions max(mm)	Total weight (kg)	Frame (kg)	Battery weight (kg)	Must+floodlight weight (kg)		
	867x627x1824 (LxWxH)	867x627x3120 (LxWxH)	63	28	24	11		
Floodlights	Type	Power (each)	IP level	Illuminated area (sqm)				
	Led	2x29W+1x13W	65	450				
Mast	Lifting method	Max Height		Max Wind Speed				
	Manual	3120 mm		110 km/h				
Battery	Type	Battery number	Power Battery Pack	Running time	Battery charger	Charging time with floodlights off	Expected battery cycle	Expected battery life
	LITHIUM	1	25,9Vdc 200 Ah	60 h	230V 1Ph Built-in	3 h	2000	60000 h



TRIME[®] Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it
Lighting Towers