

TB60/TB66J

TELESCOPIC BOOM LIFTS



- Powerful diesel telescopic boom lifts
- Available with and without a jib boom
- High torque, 4 wheel drive
- Simple to operate and maintain
- Ideal for construction applications

 **snorkel**
www.snorkellifts.com

TELESCOPIC BOOM LIFTS

TB60/TB66J



DIMENSIONS	TB60	TB66J
Max. working height	66 ft	72 ft
Max. platform height	60 ft	66 ft
Max. horizontal reach	49 ft 10 in	56 ft
Platform size	8 ft x 3 ft	8 ft x 3 ft
Overall width (A)	8 ft	8 ft
Overall length (B)	30 ft 10 in	32 ft 9 in
Stowed height (C)	8 ft 10 in	8 ft 9 in
Wheelbase	10 ft	10 ft
Ground clearance	13 in	13 in

PERFORMANCE	TB60	TB66J
Platform capacity	500 lbs	500 lbs
Max. drive height	60 ft	66 ft
Max. wind speed	28 mph	28 mph
Max. drive speed (stowed)	3.0 mph	3.0 mph
Max. drive speed (elevated)	0.5 mph	0.6 mph
Jib length	n/a	6 ft 6 in
Jib arc	n/a	135°
Platform rotation	157°	150°
Superstructure rotation	360° continuous	360° continuous
Tailswing	65 in	68 in
Gradeability	30 %	30 %
Inside turning radius	15 ft 5 in	15 ft 5 in
Outside turning radius	26 ft 7 in	26 ft 7 in
Tires	15 in x 19 in foam filled lug	
Controls	proportional drive, lift, rotate	
Drive system	4 wheel drive	

POWER	TB60	TB66J
Power source	Kubota 59hp Tier 4i Flex V2403 Turbo Diesel	
Auxillary power unit	12V DC	12V DC

WEIGHT	TB60	TB66J
Weight	21,731 lbs	25,500 lbs

WORKING ENVELOPE

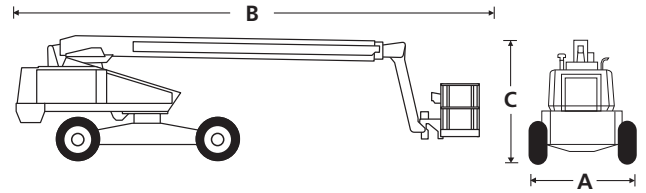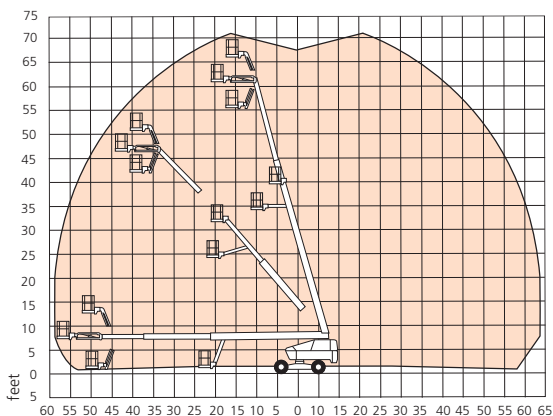

STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- 6 ft 6 in 135° jib (TB66J only)
- Hydraulic platform rotation
- Drive motion alarm
- Flashing amber light
- Foam filled lug tires
- Proportional drive, boom lift & swing
- Dual lanyard attachment points
- Rheostat control for jib, extend & platform level
- Power line to platform
- Tri-entry platform
- 5° tilt alarm
- Horn
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

OPTIONS

- Special paint colors
- Airline to platform
- AC generator 110V/240V
- Non-marking tires
- Cold weather package
- Extreme cold weather package
- Extreme environment package
- Light package
- Tow package
- Glazier package
- 12k generator package
- 12k generator/welder package
- CSA compliant

snorkel www.snorkellifts.com

P.O. Box 1160
 St. Joseph, MO 64502-1160, USA
 Tel: 1 (785) 989-3000
 Toll-free: 1 (800) 255-0317
 Sales Fax: 1 (785) 989-3070
 Parts Fax: 1 (785) 989-3077