

AB80J/AB85J

ARTICULATED BOOM LIFTS



- The ultimate diesel articulated booms
- Excellent aerial maneuverability with “up & over” capabilities
- Powerful 4 wheel drive and 4 wheel steer
- Smooth, precise, easy to use controls
- Simple to maintain and service

 **snorkel**
www.snorkellifts.com

ARTICULATED BOOM LIFTS

AB80J/AB85J



DIMENSIONS	AB80J	AB85J
Max. working height	85 ft 11 in	90 ft 6 in
Max. platform height	79 ft 11 in	84 ft 6 in
Max. horizontal reach	59 ft 5 in	61 ft 11 in
Clearance height at max. outreach	27 ft 11 in	27 ft 11 in
Platform size	8 ft x 3 ft	8 ft x 3 ft
Overall width (A)	8 ft 6 in	8 ft 6 in
Overall length (B)	32 ft 2 in	41 ft 2 in
Stowed height (C)	9 ft 10 in	9 ft 10 in
Ground clearance	13 in	13 in

PERFORMANCE	AB80J	AB85J
Platform capacity (SWL)	500 lbs	500 lbs
Max. wind speed	28 mph	28 mph
Max. drive height	79 ft 11 in	84 ft 6 in
Max. drive speed (stowed)	3.0 mph	3.0 mph
Max. drive speed (elevated)	0.6 mph	0.6 mph
Jib length	5 ft	6 ft 6 in
Jib working arc	140°	135°
Jib rotation	n/a	140° side to side
Platform rotation	150°	150°
Superstructure rotation	360° continuous	360° continuous
Tailswing	35 in	35 in
Raise/lower time	240/240 seconds	240/240 seconds
Gradeability	40%	40%
Inside turning radius	7 ft 10 in	7 ft 10 in
Outside turning radius	15 ft 5 in	15 ft 5 in
Tires	15 x 625 foam filled lug	
Controls	proportional joystick	
Drive system	4 wheel drive	

POWER	AB80J	AB85J
Power source	Kubota 59hp Tier 4i Flex V2403 Turbo Diesel	

WEIGHT	AB80J	AB85J
Weight	36,800 lbs	38,580 lbs

WORKING ENVELOPE

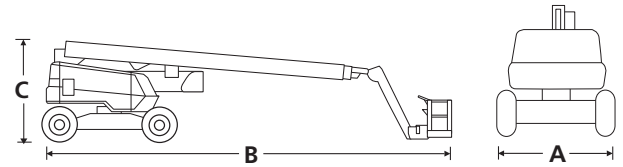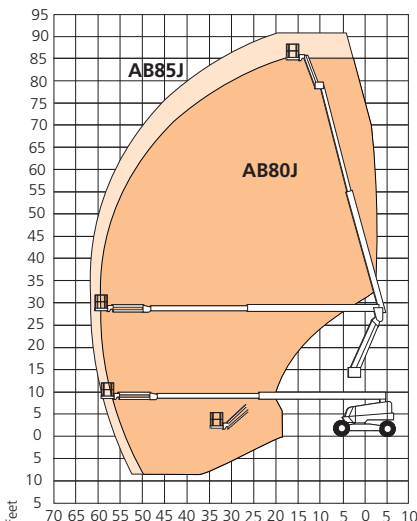

STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- Hydraulic platform rotation
- Four wheel drive, steer and crab steer
- Foam filled lug tires
- 360° continuous turntable rotation
- Proportional drive, lift & swing, extend & rotate
- Drive motion alarm
- Flashing amber light
- Horn
- Dual lanyard attachment points
- Power line to platform
- 5° tilt alarm
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

OPTIONS

- Special paint colors
- Airline to platform
- AC generator 110V/240V
- Non-marking tires
- Aircraft package
- Deluxe aircraft package
- Cold weather package
- Extreme cold weather package
- Extreme environment package
- Light package
- Tow package
- Glazier package
- 12k generator package
- 12k generator/welder package
- CSA compliant

snorkel www.snorkellifts.com

P.O. Box 1160
 St. Joseph, MO 64502-1160, USA
 Tel: 1 (785) 989-3000
 Toll-free: 1 (800) 255-0317
 Fax: 1 (785) 989-3070
 Email: sales.usa@snorkellifts.com